


PROUD TO PRESENT (TA)





Our Product

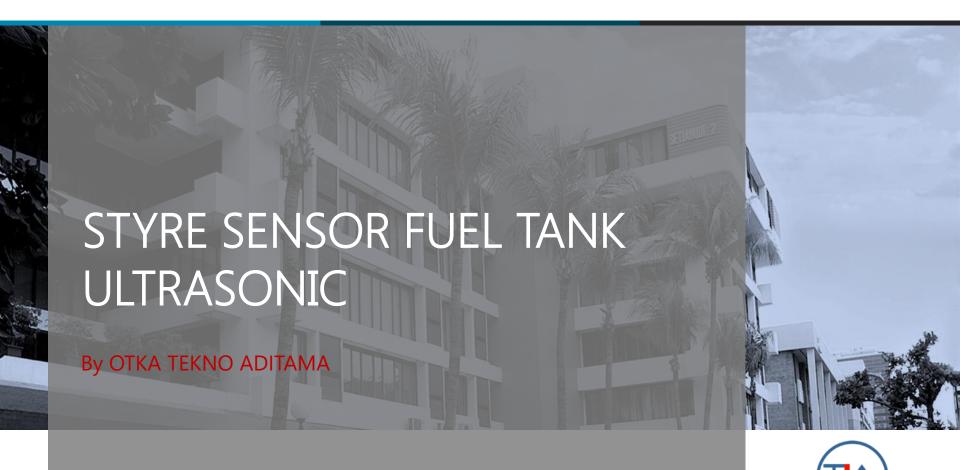



Features:

- 1. Strong anti-interference ability, can be applied to Serious environment for liquid level measurement.
- 2. Built-in temperature sensitive components, have real-time and auto Temperature Compensation function.
- 3. Various types of output to meet the needs of different industrial field interface.
- 4. High-tech to reach Minimum blind area is only 6mm.







Information

Types	Standart Integrated	Mini Integrated	Separated
Stroke	5m,8m,10m,12m,15m,20m,25 m,30m	1m,2m	5m,8m,10m,12m,15m,20m,25m,30m
Blinding Area	≤0.25~1.5m (By Stroke)	≤0.06~0,15m (By Stroke)	≤0.3~1.5m (By Stroke)
Emit Angle Accuracy Resolution	<10° ±0.3%F.S 1mm	<6° ±0.1%(±1mm or ±1.5mm) 1mm	<12° ±0.3%F.S 1mm
Power Supply	DC12—24V or AC220V Power: <1.5W	DC12—24V Power: <1.5W	DC12—24V or AC220V Power :<5W
Output	Current: 4~20mA,0~20 mA Voltage: 0~5V,0~10V Digital: RS485(Modbus),GPRS Wireless On/off:2 NPN/ 2-way Relay	Current: 4~20mA,0~20 mA Voltage: 0~5V,0~10V Digital: RS485(Modbus) On/Off:3 NPN	Current: 4~20mA,0~20 mA Voltage: 0~5V,0~10V Digital:RS485(Modbus),HART,GPRS,Min iSD,USB On/OFF: 4 Chunnel Relay (AC:5A/ 250V, DC:10A /24V)
	AC: 5A/250VDC:10A/24V)		5 40 145040
Connection	5~10m: M60*2 20~30m:DN80 Flange	M30*1.5	5~10m: M60*2 20~30m:DN80 Flange
Enclosure Rating	Whole: IP65 or IP66/67,Sensor IP68	Whole: IP65 or IP66/67,Sensor IP68	Whole: IP65 or IP66/67,Sensor : IP68

Note: Specification are subject to change without notice









DISCUSSION













THANK YOU

PT. OTKA TEKNO ADITAMA

Setiabudi 2 Building 2nd floor Suite 207 B-C. Jl. H. R. Rasuna Said Kav. 62.

Jakarta 12920 ~ Indonesia

T: 021-52900828 - F: 021-52971875

Website: http://www.otka.co.id - Email: info@otka.co.id