




STYRE CCTV

STY-HDW-CCTV

2MP Full HD Network Small IR Eyeball Camera



DIMENSIONS (mm)

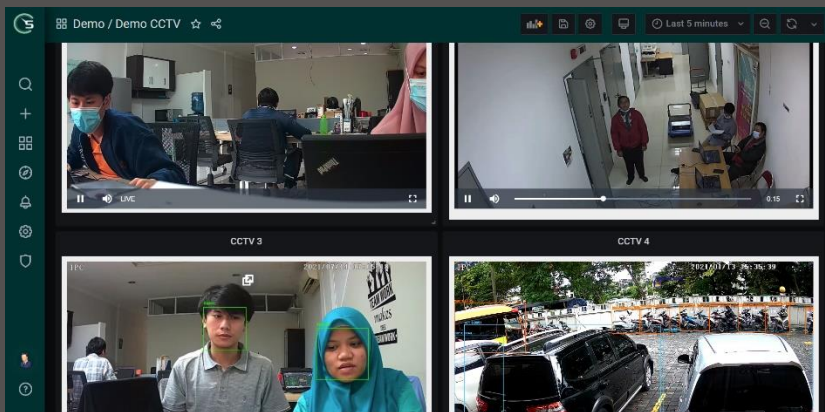

TECHNICAL SPECIFICATIONS

Camera		Camera Features	
Image Sensor	1/2.7" 2 Megapixel progressive scan CMOS	Max. IR LEDs Length	30m
Effective Pixels	1920 (H) x 1080 (V)	Day/Night	Auto (ICR)/Color/B/W
Scanning System	Progressive	Backlight Compensation	BLC/HLC/DWDR
Electronic Shutter Speed	Auto/Manual, 1s-1/30000s	White Balance	Auto/Manual
Min. Illumination	0.025Lux/F2.1 (Color), 0Lux/F2.1 (IR on)	Gain Control	Auto/Manual
S/N Ratio	More than 50dB	Noise Reduction	3D
Video Output	N/A	Privacy Masking	Up to 4 areas
Lens		Network	
Focal Length	3.6mm (6mm optional)	Ethernet	RJ-45 (10/100BaseT)
Max Aperture	F2.1 (F2.0)	Wi-Fi	N/A
Focus Control	Manual	Protocol	IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPOE, DDNS, FTP, IP Filter, QoS
Angle of View	H: 93° (63°)	Compatibility	ONVIF, CGI
Lens Type	Fixed Lens	Max. User Access	20 Users
Mount Type	Board-in Type	Smartphone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface		General	
Memory Slot	N/A	Power Supply	DC12V, PoE (802.3af)
RS485	N/A	Power Consumption	< 4.4W (IR on)
Alarm	N/A	Working Environment	-30°C ~ +60°C, Less than 95% RH
PIR Sensor Range	N/A	Ingress Protection	IP67
Audio		Vandal Resistance	N/A
Compression	N/A	Dimensions	ø 108mm x 84mm
Interface	N/A	Weight	0.25 Kg (with package 0.38Kg)
Video			
Frame rate	Compression	H.264/H.264H/H.264B/MJPEG	
	Resolution	1080P (1920x1080)/720P (1280x720)/D1 (704x576 / 704x480) / CIF (352x288 / 352x240)	
	Main Stream	1080P (1-25/30fps)	
	Sub Stream	D1 (1-25/30fps)	
		Bit Rate	H.264: 4kbps ~ 8192bps
		Corridor Mode	Support