


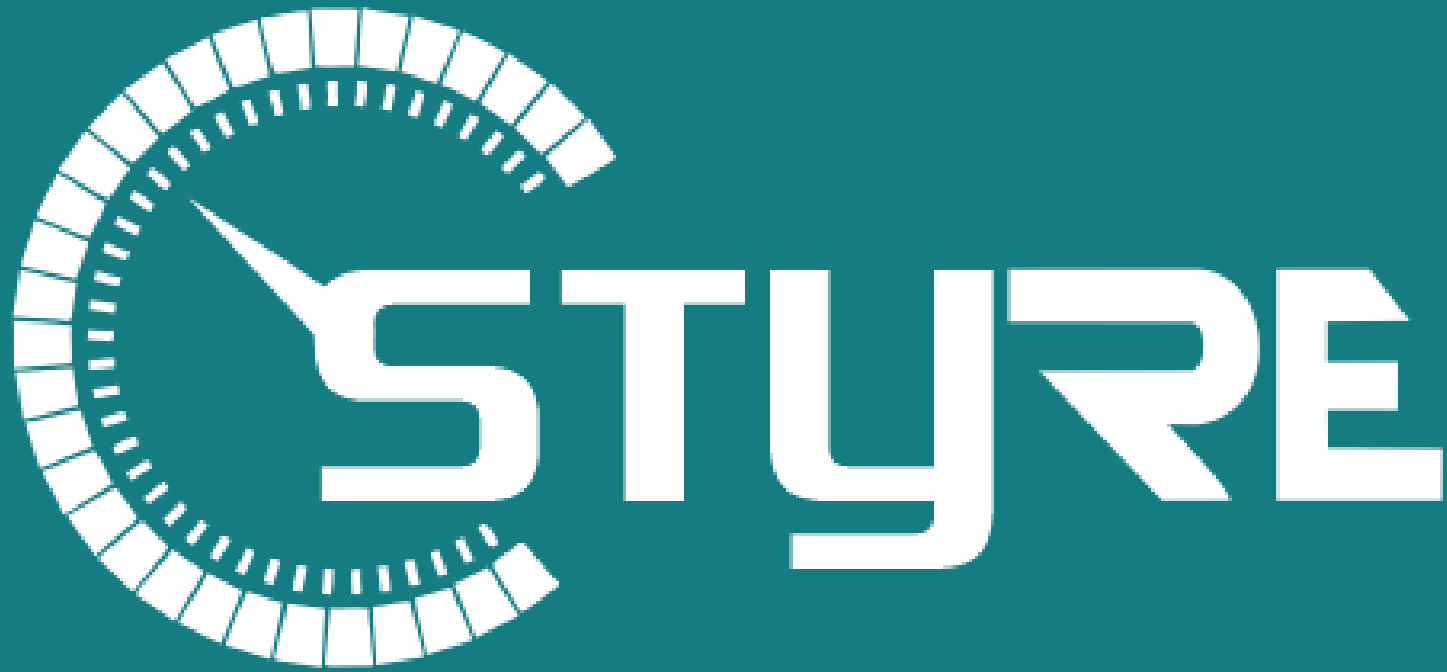

PROUD TO PRESENT 

Present for

STYRE MOTION SENSOR

By OTKA TEKNO ADITAMA



Our Product




Features:

- Using low-power CMOS 8-bit processor
- The automatic temperature compensation function
- Anti RFI interference: 20 ~ 1000MHZ (mobile communication)
- Optional three-alarm delay output

Information


SPEISIFICATION	VALUE
Power supply	10 ~ 30V DC
Alarm delay	30s, 10s, 5s output optional
Mounting height	2.5 ~ 6m
Detection range	6M diameter (mounting height 3.6m)
Detection angle	full 360 °
Signal Output	RS485 (Modbus-RTU)
Working Environment	-10 °C ~ 50 °C, ≤ 95%, non-condensing

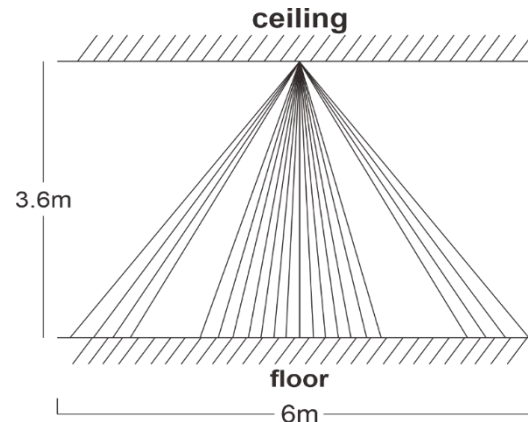

Note : Specification are subject to change without notice



now & tomorrow partner



DISCUSSION



now & tomorrow partner



otka.co.id



[@otkatech](https://www.facebook.com/otkatech)



[@otkatechnology](https://www.instagram.com/otkatechnology)



[@otkatechnology](https://www.twitter.com/otkatechnology)



[@otkatechnology](https://www.youtube.com/otkatechnology)



now & tomorrow partner

THANK YOU

PT. OTKA TEKNO ADITAMA

Setiabudi 2 Building 2nd floor Suite 207 B-C. Jl. H. R. Rasuna Said Kav. 62.

Jakarta 12920 ~ Indonesia

T: 021-52900828 - F: 021-52971875

Website: <http://www.otka.co.id> - Email: info@otka.co.id